



SOUNDPROOFED SPRAY AND WASHER TANKER

Our capable tanker series offers high functionality and versatility to give you the best available solution for street washing, spraying gardens or fighting fires. With a wide range of options, each model in the series can be configured to perfectly meet your requirements.

SOUNDPROOFED SPRAY AND WASHER TANKER




Centralised maintenance.



Soundproofed cabinet.



Side hose compartment.

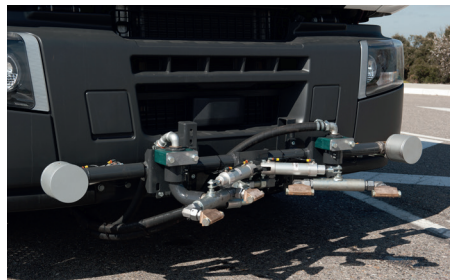

Washer spray cone and nozzle bar.



Control panel.

Benefits

Large range of models: two cross-sectional size options to suit a wide range of chassis.
Occupational safety: includes safety mechanisms, locking device and ergonomic design.
Simple, low cost maintenance.
Reduced environmental impact: low noise level, certified at 97 dB.

Capacities

From 8600 up to 16,000 litres (depending on options and chassis).

Materials

Aluminium 5083.

Control panel

Electro-pneumatic, fitted with display for manmachine interface.

Pump drive

Direct power take-off or automatic gearbox.
Hydrostatic transmission with variable flow.

Pressure pump

Multistage pump RRME 15/15.
Pump RRP70 30/7 (optional).
Multistage pump RRME 18/20 (optional).
High pressure pump 200/21 (optional for high pressure gun).

Pressure outputs

25 mm valve on the right or left.
2nd valve (optional).
Fitted with stopcock and standard connector.

Spray cones

Two sprinkler cones (optional).

Street washers

Front-mounted washers with pneumatic directional control.
Second set of nozzles (optional).
Side-mounted washers (optional).
Variaqua system: nozzle set with adjustable flow (optional).

Hose Reel

Reel with semi-rigid hose.
Manual or electric drive.

Spray bars

Adjustable spray bar with aluminium plating.

Finish

Aluminium construction.
RAL colour painted finish.
Oven baked.

Vacu-Jet system (optional)

Special nozzle with blower effect
Reduces consumption by 60%
Variable flow rate
Adjustable spray gun
High pressure
Maximum autonomy
HPP pump (65 bar - 9 m³/h)

Model	Capacity (l)	Cross-section area (m ²)	Length (mm)	GVW (T)	Wheelbase (mm) (1-2 axes)	Legal capacity (l)	Width of unit (mm)
Tanker 8	8,600	2.72	3,150	15	3,105	8,200	2,250
Tanker 9	10,000	2.72	3,650	16	3,700	9,000	2,250
Tanker 10	10,000	2.72	3,650	18	3,700	10,000	2,250
Tanker 16	16,000	4.00	4,000	26	4,100+1,350	16,000	2,500



Postbus 20, 3400AE, IJsselstein, The Netherlands

+31 (0) 30 68 68 700 info@terbergenvironmental.com

www.terbergenvironmental.com